

December 19, 2018



**REQUEST FOR QUOTES DATED NOVEMBER 28, 2018  
PAVING SERVICES AT NORTON APARTMENTS  
AMENDMENT #2**

**A. ADDITION TO SCOPE OF WORK:**

See attached map for 3' x 35' section highlighted in green.

**B. QUESTIONS/CLARIFICATIONS:**

**Q1. Damaged asphalt:**

**Q1a. How deep do they need us to mill? Are we getting to the base?**

A1a. Yes- remove the portion of concrete all the way to the base.

**Q1b.Type of asphalt?**

A1b. Pour Type III asphalt (hot mix), thickness should match existing, compact to approved manufacturer's density, and then use tack coat to bond new asphalt to existing asphalt.

**Q2. Restripe all pavement lines: for the wheel stop: only include unit number, not the concrete wheel stop itself?**

Correction- paint all wheel stops yellow and unit numbers black. Note: not all wheel stops have unit numbers.

**C. CHANGE TO DEADLINE FOR QUOTES:**

Deadline for quotes is extended to Wednesday, December 26, 2018.

**ACKNOWLEDGEMENT OF RECEIPT OF DOCUMENTS**

**All prospective contractors for the above-referenced solicitation must sign this acknowledgement form as verification of receipt of document.**

**NOTE: Each prospective bidder must submit this form with the submission package. Any proposals not including this form may be considered non-responsive.**

**Acknowledged by:**


\_\_\_\_\_  
Company Name

\_\_\_\_\_  
Printed Name of Authorized Company Official

\_\_\_\_\_  
Signature of Authorized Company Official

Date: \_\_\_\_\_

## Addendum #2

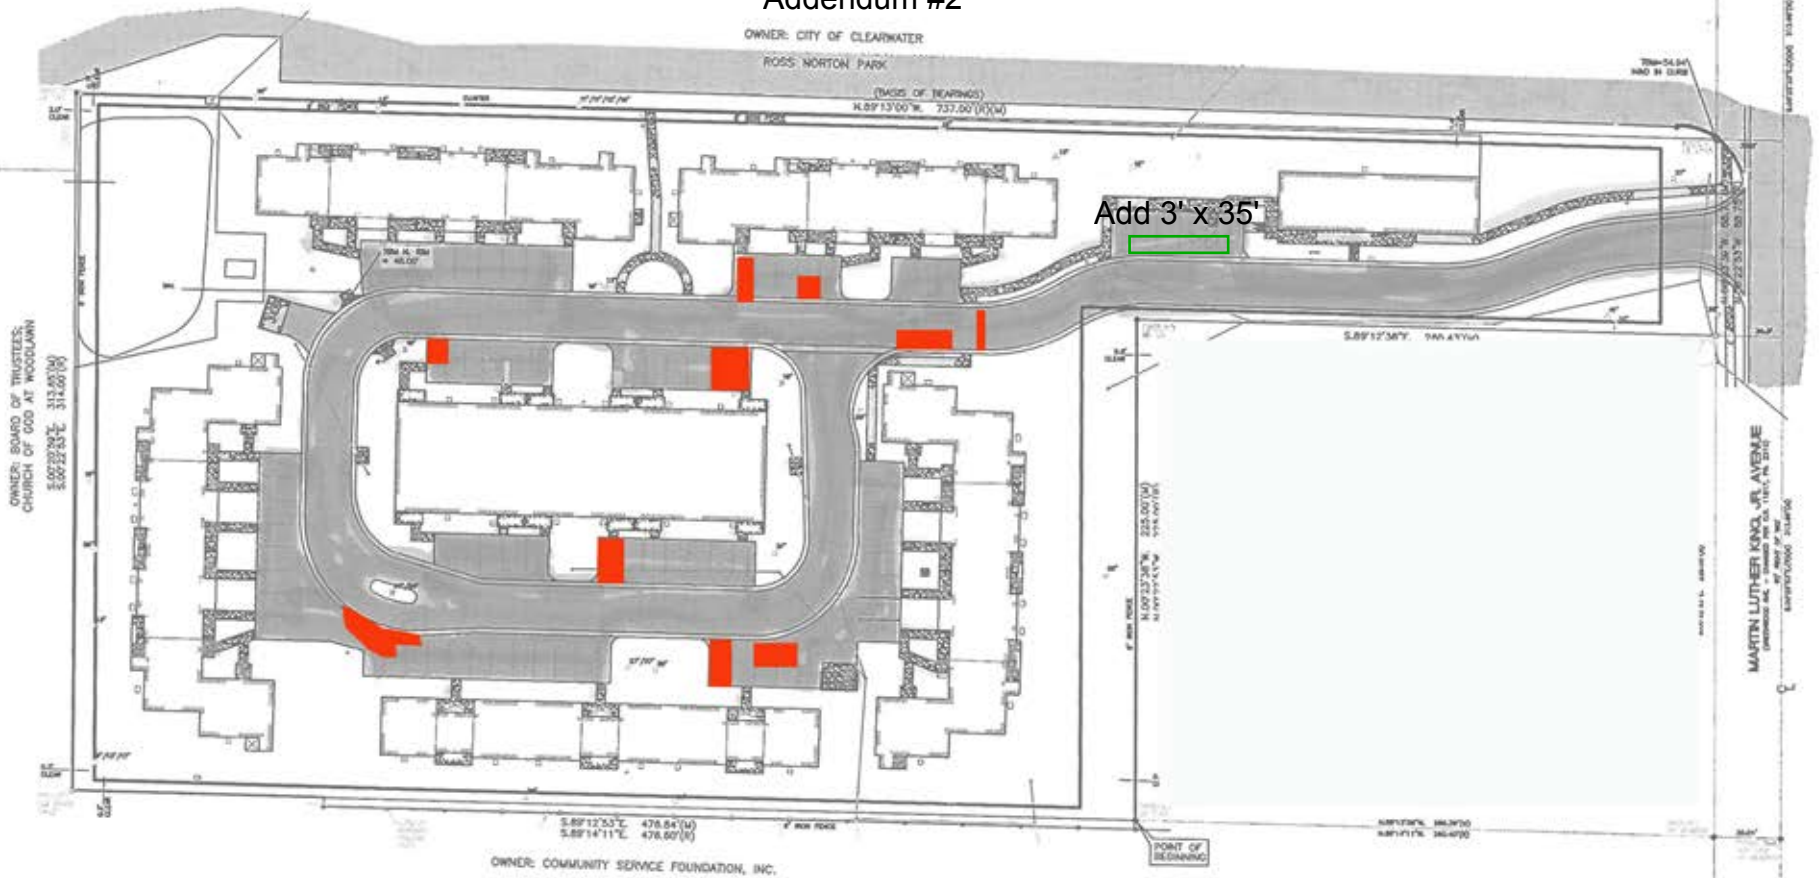

REFER TO SCOPE OF WORK TACK COAT REPAIRS. RED AREAS ARE NEAR THE FOLLOWING LOCATIONS: PARKING SPOTS 203, 201, 701-702, 706, 506, 710, 502, 501, 601 AND (2) SPEED BUMPS. LOCATIONS ARE ALSO MARKED ONSITE.



**NORTON APARTMENTS SITE PLAN**