



ADDENDA #1

DATE: 3/02/2021

ISSUED BY: Miguel A. Hernandez, CFP Coordinator

21-PC-002 VCA IMPROVEMENTS AT PALM CENTRE

**Please acknowledge the following addenda by signing this form and send by email or fax:
vrodriguez@hialeahhousing.org or by fax 305-887-0997:**

**PLEASE INCLUDE THE ATTACHED “EXHIBIT A”, AS PART OF THE SCOPE OF WORK
FOR THE 60 E 3RD STREET BUILDING, LAUNDRY ROOM - VCA IMPROVEMENTS.**

**EXCEPT AS PROVIDED HEREIN, ALL TERMS AND CONDITIONS OF THE SOLICITATION REMAIN
UNCHANGED AND IN FULL FORCE AND EFFECT.**

ACKNOWLEDGEMENT OF RECEIPT


DATE:

COMPANY NAME:

NAME:

TITLE:

"EXHIBIT A"

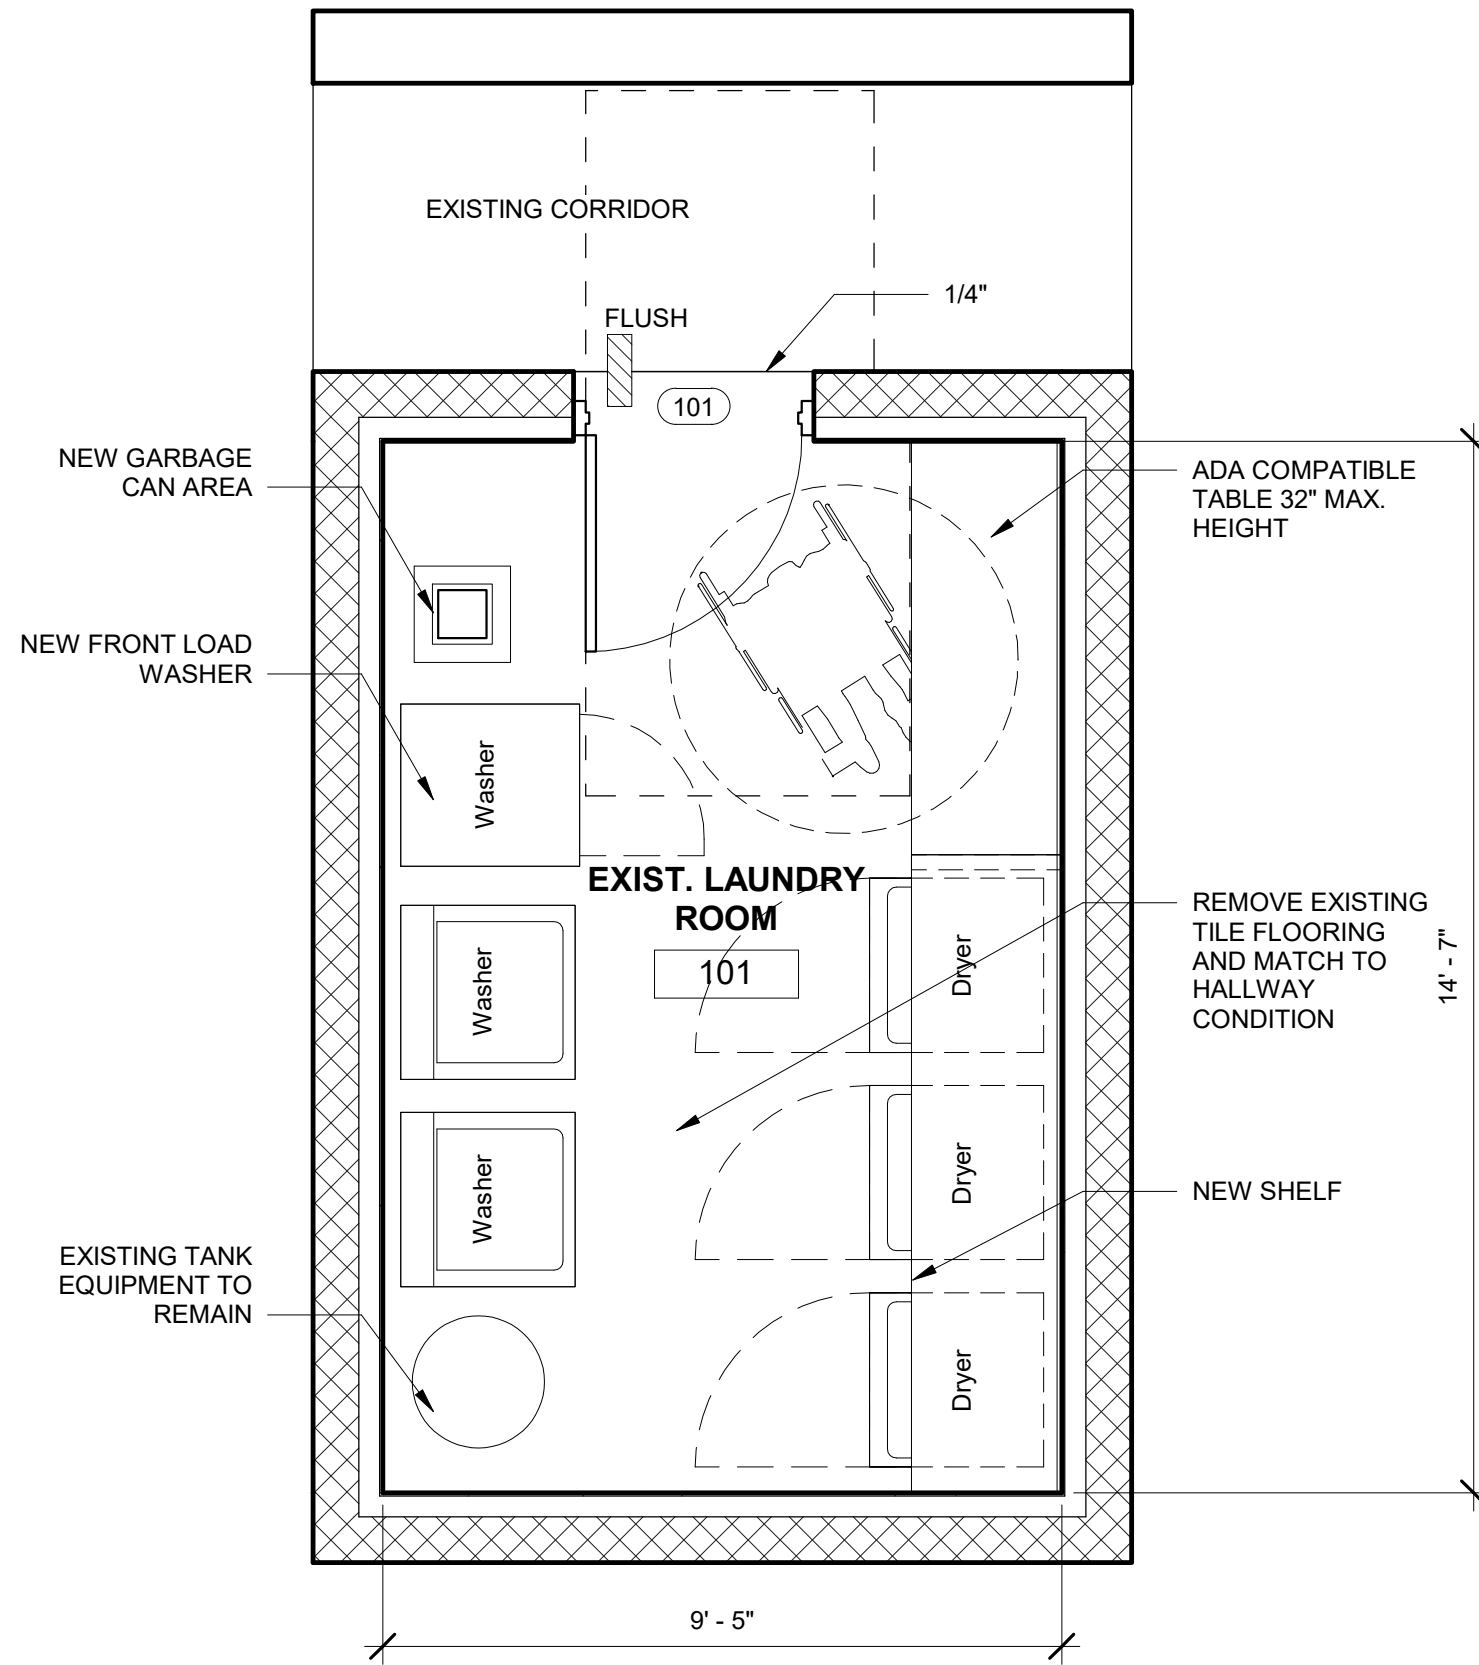

LEGEND:

ROOM NAME	ROOM NAME AND NUMBER
-	
-	

NOTE:

SECTION 11-4.32 FIXED OR BUILT-IN SEATING AND TABLES
 IF SEATING FOR PEOPLE IN WHEELCHAIR IS PROVIDED AT TABLES OR COUNTERS, KNEE SPACES AT LEAST 27" HIGH, 30" WIDE AND 19" DEEP SHALL BE PROVIDED. 11-4.32.3

GENERAL NOTE:

ONE (1) DRYER AND ONE (1) WASHER TO BE REMOVED TO COMPLY WITH ADA ACCESS. REPLACE ONE (1) WASHER WITH FRONT LOADING FOR ADA ACCESS. ELECTRICAL OUTLETS TO BE LOWERED FOR NEW SHELF BEHIND DRYERS. INSTALL AN AC SUPPLY VENT, BRAILED SIGNAGE OUTSIDE OF LAUNDRY ROOM. ALSO, LAUNDRY ROOM TO BE PAINTED. PATCH AND REPAIR ANY WALLS WHICH ARE AFFECTED AND/OR ARE DAMAGED AS A RESULT OF RELOCATING THE OUTLETS AND OTHER EQUIPMENT.

GENERAL NOTE:

1. NEW PORCELAIN TILE FLOOR
2. NEW DRYWALL CEILING
3. NEW RETURN GRILLE
4. NEW RECESSED LUMINAIRES
5. NEW MILLWORK BEHIND WASHING MACHINES

1 PROPOSED SKETCH - MODIFICATION TO EXISTING LAUNDRY ROOM
 3/8" = 1'-0"

Scale 3/8" = 1'-0"